



REVISIONS			
NO	DESCRIPTION	APPROVED	DATE

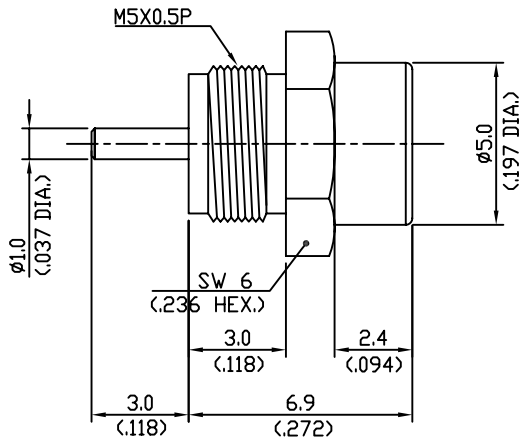

Impedance.....50 $\Omega$   
 Frequency range.....DC ~ 6GHz  
 V.S.W.R.....N/A  
 Dielectric withstanding  
 - Voltage(at sea level).....750Vrms.50Hz  
 - Working voltage(at sea level)..... $\leq 250$ Vrms.50Hz  
 Insulation resistance..... $\geq 10^4$  M $\Omega$   
 Center contact resistance..... $\leq 5$  M $\Omega$   
 Out contact resistance..... $\geq 1$  M $\Omega$   
 Temperature range.....-65 $^{\circ}$ C ~ +165 $^{\circ}$ C  
 Temperature shock.....MIL-STD202,Method107,ConditionC  
 Moisture resistance.....MIL-STD202,Method106  
 Corrosion.....Saltspray Test acc.to MIL-STD-202,  
 Method101,ConditionB  
 Vibration.....MIL-STD202,Method204,ConditionD  
 Engagementforce..... $\leq 25$ N/5.6lbs.  
 Disengagementforce.....8N-10N/1.8lbs.-4.5lbs.  
 Contact captivation..... $\geq 10$ N/2.3lbs.


Mounting hole



Connector parts	Material	Plating
Body	Brass	Gold
Center contact	Brass	Gold
Insulator	PTFE	White

TOL.UNLESS NOTED  
 X =  $\pm 0.1$   
 X.X =  $\pm 0.05$   
 X.XX =  $\pm 0.01$

DATE	
DRAWN BY	
DESIGNED BY	
CHECKED BY	
APPD.BY	
SCALE 1 : 1	UNIT mm

	www.rfacsolutions.com
	TITLE MCX BULKHEAD JACK BR (0X3.0)
DRAWING NO	R320-023-000
SHEET	1 OF 1